



3-REGOLAZIONE DELLA CARTUCCIA CARTRIDGE REGULATION


MASSIMA PORTATA
MAXIMUM FLOW




RIDUZIONE PORTATA
REDUCING FLOW




MAX FREDDA
MAX COOL



MAX CALDA
MAX HOT

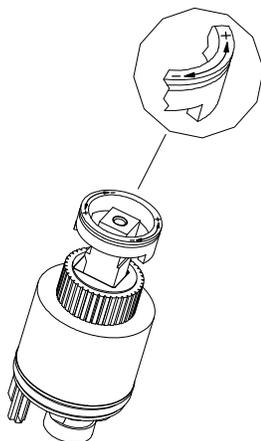

4-SOSTITUZIONE DELLA CARTUCCIA REPLACEMENT OF CARTRIDGE

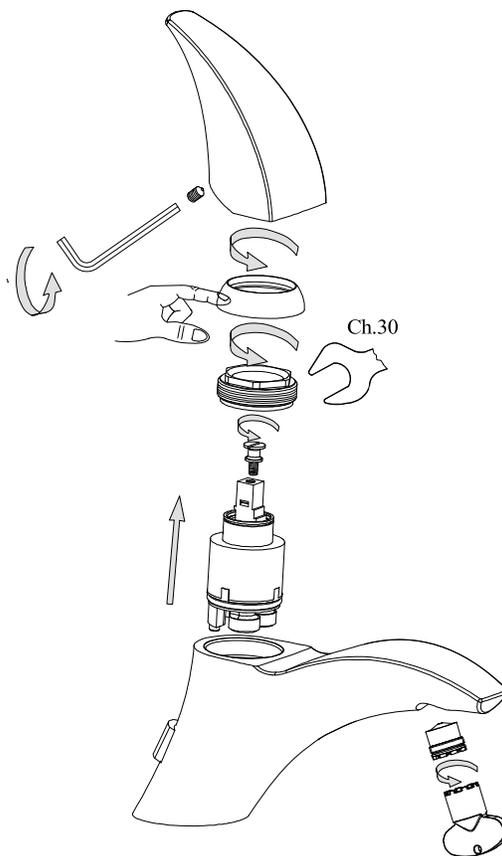


5- PULIZIA CLEANING

- I** - Per la pulizia quotidiana del vostro miscelatore usare unicamente acqua e sapone e asciugare con un panno morbido.
- Non usare altri detersivi o abrasivi che potrebbero danneggiare o deteriorare la superficie cromata del miscelatore.
- GB** - For the daily cleaning of your mixer, you must use water and soap only and you have to wipe it
With a soft cloth.
- Do not use any other abrasive cleanser which can damage the surface of the mixer.

6- CONDIZIONI DI LAVORO JOB CONDITIONS


- I** - Pressione Min. di funzionamento 1 Bar
- Pressione Max. di funzionamento 5 Bar
- Pressione di funzionamento raccomandata 2÷4 Bar
- Temperatura Max. acqua calda 80° C
- Temperatura acqua calda raccomandata 60° C
- Per pressioni superiori a 5 Bar installare un riduttore di pressione.
- GB** - Minimal pressure of operation 1 Bar
- Maximal pressure of operation 5 Bar
- Pressure of operation registered letter 2÷4 Bar
- Temperature maximum hot water 80° C
- Temperature warm water registered letter 60° C
- For advanced pressures to 5 Bars to install a pressure reducer

MISCELATORE MONOCOMANDO LAVABO & BIDET
BASIN & BIDET SINGLE-LEVER MIXER

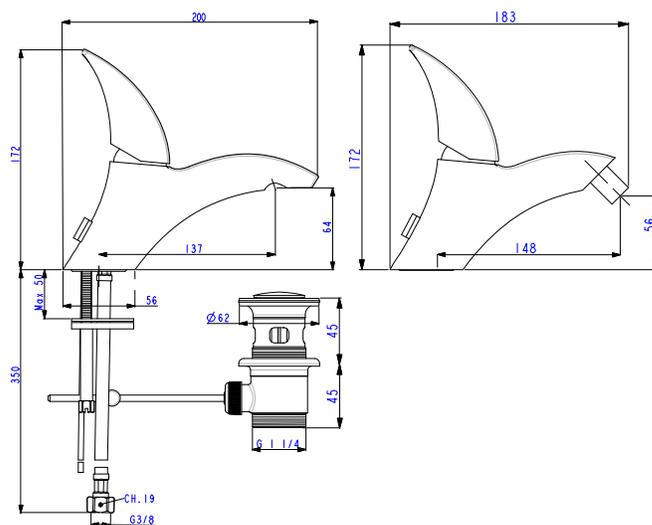


**1- INSTALLAZIONE :
INSTALLATION :**


1.1

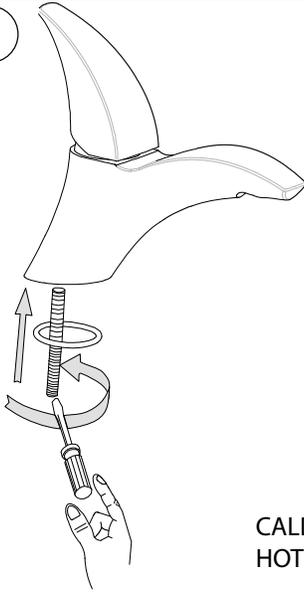


1.2

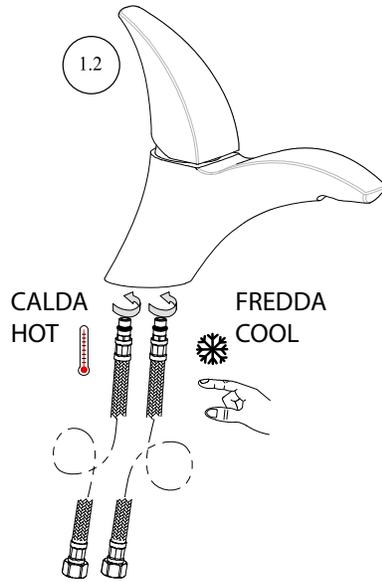

1.3

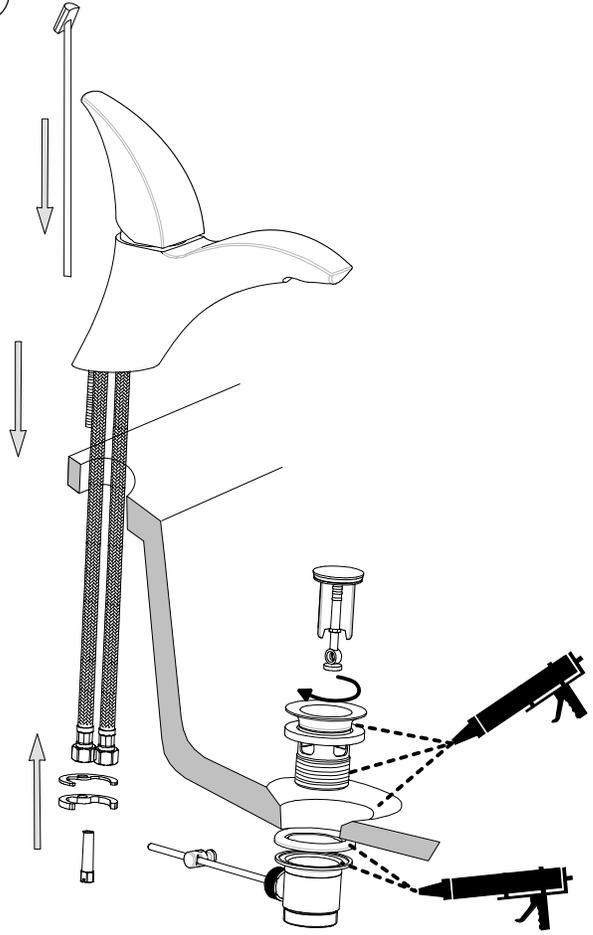

1.4

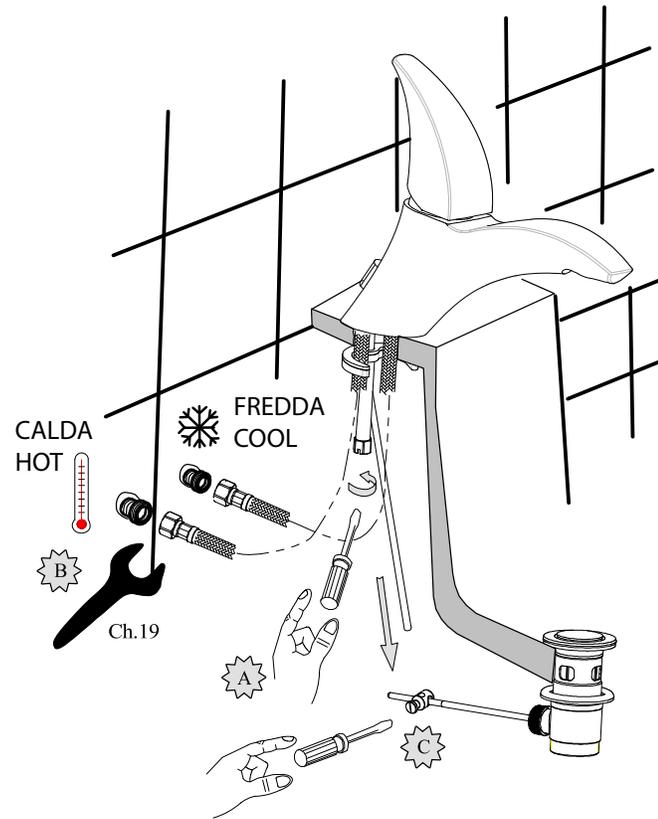

**2- FUNZIONAMENTO :
OPERATION :**

